

Overview

FLEXPOWER RC SERIES is a 12/24VDC single or dual voltage, rackmount power system with multiple control outputs specifically designed for use within the access, security, CCTV, and mass notification segments of the life safety industry. Multiple output options provide for simple power distribution for auxiliary equipment power, and controlled power distribution for lock and signaling control. *Models ending in "/E" are preset for a 230VAC input from the factory.*

Output options include eight or sixteen controlled or eight controlled and eight distributed outputs (C8D8 models) each fused at 3A and individually protected against electrical surges caused by lightning or transients on the external wiring. The controlled outputs feature optoisolated inputs for independent control of each output by means of voltage application, open collector, or normally open or closed contact transfer.

Models

*Single Voltage: **RC250** 12 or 24VDC selectable

*Dual Voltage: **RC250/250** 12 or 24VDC selectable

Dual Voltage: **RC250B** factory preset to 24 and 12VDC

Factory default setting on all FPO power supplies is 12VDC

Factory default Input voltage setting for models ending in "/E" is 230VAC

All dual voltage models allow each output to be individually set for 12 or 24VDC

Rackmount Features

- 120VAC input or user select 230VAC supports data center electrical systems
- Each input and output has dedicated two terminal pair
- Direct power supply output terminals for flexibility
- High capacity battery charging | Independent charging circuit
- Automotive fuses for improved ease of service
- Removable faceplate for serviceability

Comprehensive fault detection and reporting

- Form C contact transfer for AC Loss or brownout
- Form C contact transfer for abnormal system operation


Fire Alarm Interface

- Latching or Non-latching | Remote reset capability
- Normally Open, Normally Closed, Voltage
- Polarity Reversal Activation

Lifetime Warranty

Specifications

Input Power	Input 120/230 VAC 50/60 Hz Thermal overload protection / Short circuit protection	Models with "/E" suffix are factory preset to 230VAC
Output Power	RC250 250 Watts: 20 amps at 12 VDC or 10 amps at 24 VDC RC250B 250 Watts: 4 amps at 12 VDC and 8 amps at 24 VDC RC250/250 300W Watts: PS1 20A/12VDC or 10A/24VDC PS2 20A/12VDC or 10A/24VDC	Factory default setting on all power supplies is 12VDC RC250B factory set to 24 & 12VDC
Output Distribution	Eight or sixteen lock outputs, fused at 3A each (C8, C16) / Eight or sixteen lock outputs, class II at 2.5A each (C8P, C16P) - Individually selectable Mag Lock/Strike (Fail-Safe, Fail-Secure) solid state fuse protected outputs Eight auxiliary outputs fused at 3A each - available on RC250-C8D8 and RC250B-C8D8 only - Individually selectable outputs on dual voltage systems	
Supervision	AC input, DC1, and DC2 output Low battery and battery presence supervision (form C contacts) AC fail supervision (form C contacts) System Fault, AC Fault, Ground Fault, Reverse Battery	
External Indicators	AC on master on/off switch Front Panel Individual Output Status LEDs	
Battery Charging	Maximum charge current 1.0 amp Independent built-in charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup	
Regulatory Compliance	UL294 / UL603 / ULC S318 / ULC S319 / CSA C22.2 #107.1 / CSA 22.2 #60950 / FCC / CE	
BTU Rating	RC250 109 BTU/Hr RC250B, 109 BTU/Hr RC250/250, 218 BTU/Hr	
Physical Dimensions	2U rack mount (19.00"W x 3.5"H x 14"D) Weight 19 lbs.	

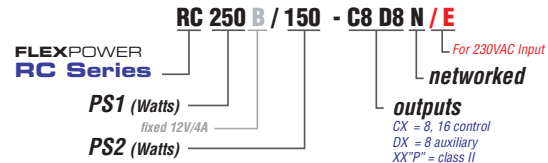

Model No.	Power	OUTPUTS		
		Bulk	Control	Auxiliary
RC250-C8	20A/12 or 10/24	2	8	
RC250-C8D8	20A/12 or 10/24	2	8	8
RC250-C16	20A/12 or 10/24	2	16	

Dual Voltage Model No.

RC250B-C8	4A/12 and 8A/24	2	8	
RC250B-C16	4A/12 and 8A/24	2	16	
RC250/250-C16	PS1 20A/12, 10A/24 PS2 20A/12, 10A/24	4	16	

**For 230VAC operation add "/E" suffix to the model number ie RC250-C8/E
For Class II power limited outputs add P after output number, ie RC250B-C8P
For remote monitoring and control see RCN and RS series datasheets*

FAULT DETECTION AND REPORTING

DETECTED FAULT CONDITIONS

AC Power

- AC loss, AC low, Master AC power switch

DC Power and System

- Abnormal or loss of power supply operation
- Over current, over temperature condition
- DC output high, low
- Battery Presence, Earth Ground (user optional)
- Reversed battery condition, blown fuse or loss of output voltage on selected accessory boards (detected on the power supply)

POWER DISTRIBUTION

CONTROL OUTPUTS

8 or 16 access control trip inputs

8 or 16 individually protected lock control outputs, fused at 3A per output

Each input may be programmed to respond to:

- Application of voltage between 9 and 33VDC
- Removal of voltage between 9 and 33VDC
- Normally open dry contact transition
- Normally closed dry contact transition

POWER DISTRIBUTION - continued

Each output may be programmed for the following modes:

- Voltage output from power supply one
- Voltage output from power supply two
- Fail-safe, Fail-secure
- Fire alarm over ride for egress lock control

Visual Indicators

- DC Presence: Green LED per output
- Fault Condition: Yellow LED per 8 output bank

Removable terminals: accepts #12 to #24 AWG

DISTRIBUTED OUTPUTS (RC250/250B-C8D8 ONLY)

Eight individually protected auxiliary outputs, fused at 3A per output

- Each output may be programmed for either voltage in dual voltage systems


Visual Indicators

- DC Presence: Green LED per output


Removable terminals: accepts #12 to #24 AWG

RC

rear panel for 8 or 16 control outputs

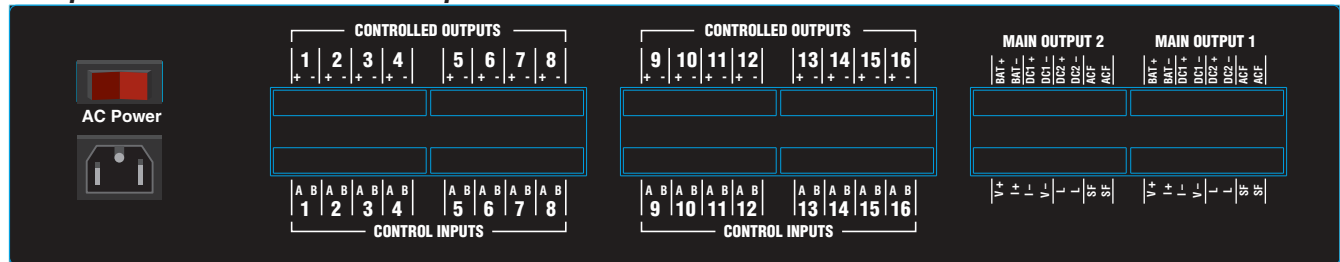

rear panel for 8 control and 8 distributed outputs

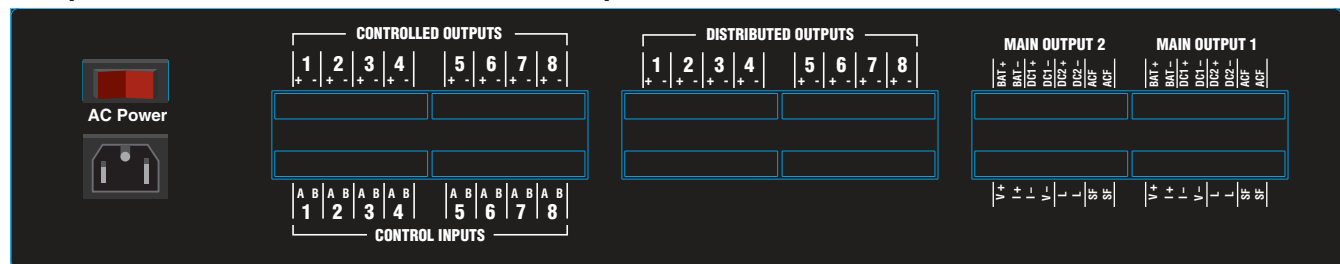

lifesafetypower.com

(888) 577-2898
info1@lifesafetypower.com

Specifications subject to change without notice.

© 2022 LifeSafety Power. All rights reserved. LifeSafety Power, ISCAN and FlexPower are registered trademarks of LifeSafety Power. All other trademarks and copyrights are the property of their respective owners.

P01-667A 07/22

LifeSafety Power
10027 S. 51st Street, Suite 102
Phoenix, AZ 85044 USA