

## Overview

VCLASS™ Unified Power Solutions are engineered to house FlexPower® power modules alongside HID VERTX™ or Aero™ access hardware in one compact, secure solution.

This unit is a 75W 12VDC access power system.

A D8 module provides eight auxiliary outputs and each output is configurable for either continuous DC or resettable DC when the fire alarm disconnect is initiated.


VCLASS enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch

## System Features

- ◆ **FPO offline power supply**
  - 120 or 230 VAC input
  - 12V (24V) DC output
  - On board Fire Alarm Interface
  - Continuous and resettable DC
- ◆ **Distributed outputs**
  - Eight auxiliary, fused at 3A each
- ◆ **Remote Monitoring & Control Option (requires NetLink module)**
  - Live voltage / current reporting
  - Remote battery load testing
  - Output power cycling and abnormal operation alert
  - System / AC fault reporting
- ◆ **Lifetime Warranty**

## Enclosure Features

- ◆ **Labor saving design**
  - Pre-wired FlexPower section
  - Pre-formed knockouts
  - Removeable backplate simplifies install
  - Pre-defined hole pattern for power section
  - Access panels mount in predefined area with included standoffs - no drilling required
- ◆ **Additional benefits**
  - 4.5" enclosure depth fits battery sets
  - Wire management room
  - Tamper switch, lock, dual key set standard

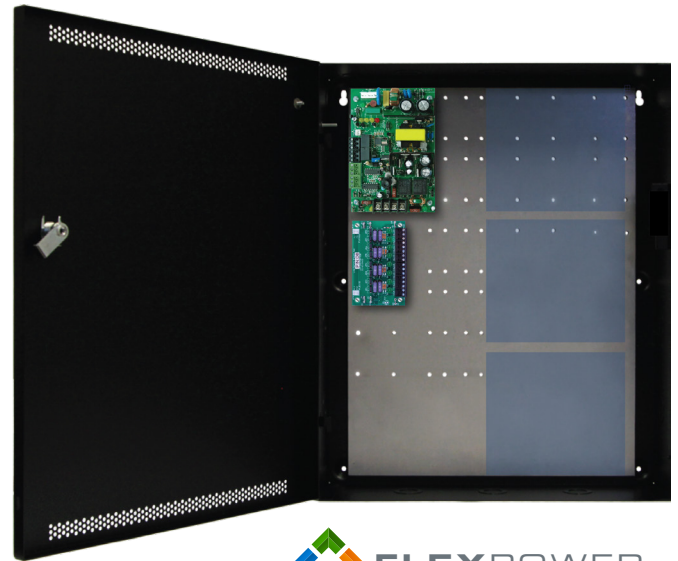

## Ordering

FPO75-D8E2V

## Description


75W (12/24V) 8 auxiliary outputs, VCLASS enclosure

## Specifications

<b>Input Power</b>	Input 120/230 VAC 50/60 Hz   83 Watts (0.69A) Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
<b>Output Power</b>	FPO75: 12V/6A or 24V/3A   75 Watts Outputs: Continuous (DC1) Resettable (DC2) 8 auxiliary outputs, fused at 3A each 120 mV output voltage ripple System Efficiency: 83%   System BTU Rating: 33 BTU/Hr
<b>Battery Charging</b>	Independent built-in 2A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
<b>Supervision</b>	AC Fail (form "C" contacts) System fail (form "C" contacts) may be triggered by low/no battery, short to earth ground and power supply failure
<b>Visual Indicators</b>	AC input, DC1 and DC2 output System fault   AC fault   Short to earth ground   Reverse battery polarity Fire Alarm Input activated D8: DC outputs
<b>Regulatory Compliance (LSP equipment)</b>	UL294, UL603, UL1076 ULC S318, ULC S319, CSA C22.2 #107.1, CSA C22.2 #60950 CE   CSFM Approved   FCC Part 15, Subpart B
<b>Physical Dimensions</b>	Enclosure: 20.00H x 16.00W x 4.50D in. (51.00 x 41.00 x 11.50 cm)
<b>Mounting Pattern For</b>	VERTX or Aero Modules



**E2V backplate mounting pattern for power and access boards**

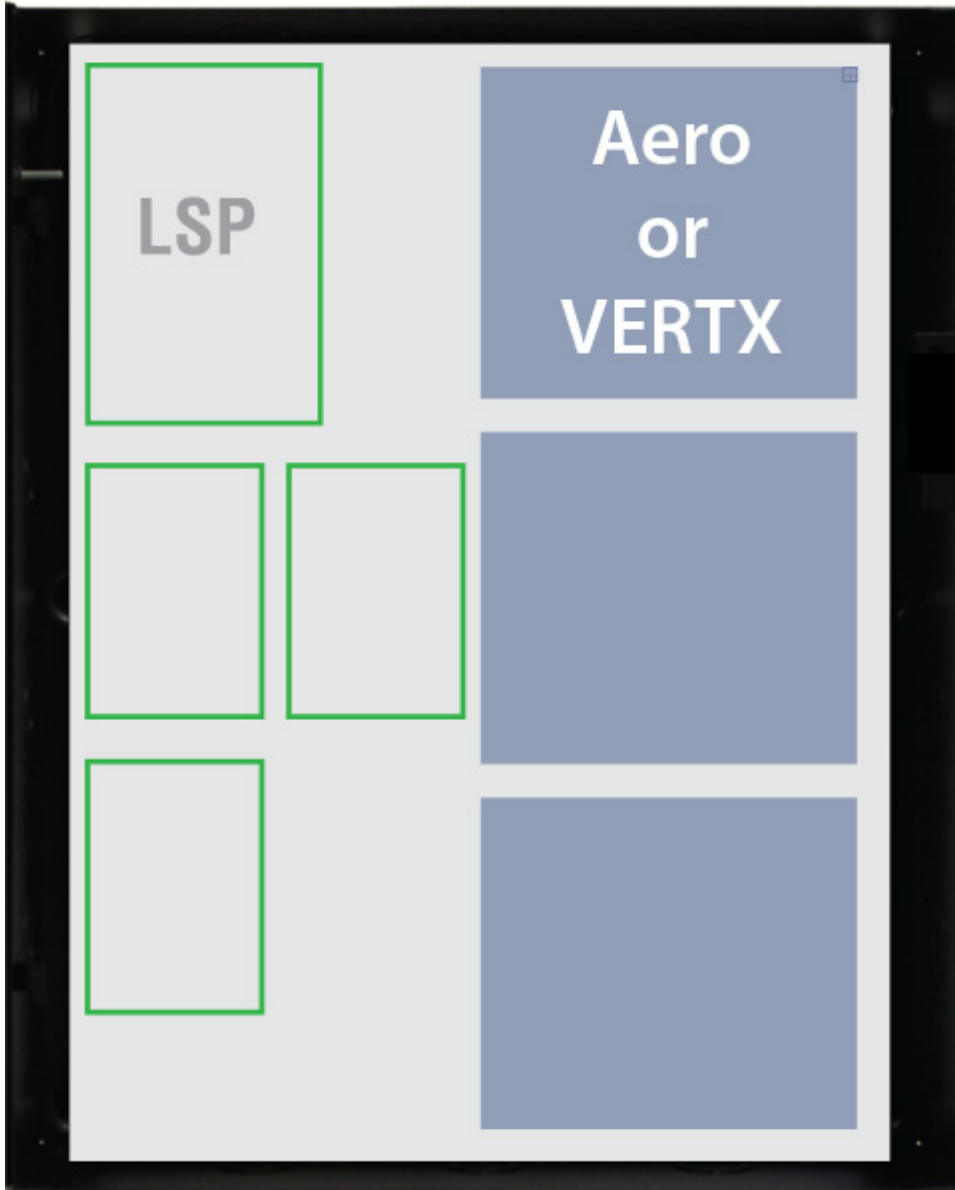

**[lifesafetypower.com](http://lifesafetypower.com)**

(888) 577-2898  
[info@lifesafetypower.com](mailto:info@lifesafetypower.com)

Specifications subject to change without notice.

© 2022 LifeSafety Power. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power. All other trademarks and copyrights are the property of their respective owners.  
P01-656A 07/22

**LifeSafety Power**  
10027 S. 51st Street, Suite 102  
Phoenix, AZ 85044 USA