

Overview

VCLASS™ Unified Power Solutions are engineered to house FlexPower® power modules alongside HID VERTX™ or Aero™ access hardware in one compact, secure solution.

This unit is a 150W 12V and 24V DC dual voltage managed access power system.

One M8 managed module provides eight access managed inputs capable of voltage or dry contact activation, and eight outputs programmable for failsafe / failsecure operation at either 12 or 24 VDC and managed by the integrated fire alarm interface circuit on the FPO. One D8 module provides eight auxiliary outputs and each output is configurable for 12 or 24VDC operation.


VCLASS enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch.

System Features

- ◆ **FPO offline power supply**
 - 120 or 230 VAC input
 - 12 and 24 VDC outputs
 - On board Fire Alarm Interface
 - Continuous and resettable DC
- ◆ **Distributed outputs**
 - Eight auxiliary, fused at 3A each
 - Eight managed, fused at 3A each
- ◆ **Remote Monitoring & Managed**
 - Live voltage / current rep
 - Live voltage / current reporting
 - Remote battery load testing
 - Output power cycling and abnormal operation alert
 - System / AC fault reporting
- ◆ **Lifetime Warranty**

Enclosure Features

- ◆ **Labor saving design**
 - Pre-wired power section
 - Pre-punched knockouts
 - Removeable backplate simplifies installs
 - Pre-defined hole pattern for power section
 - Access panels mount on threaded standoffs - no drilling required
- ◆ **Additional benefits**
 - Wire management room
 - 6.5" enclosure depth fits battery set
 - Tamper switch, lock, dual key set standard
 - Mounting hardware for access boards included

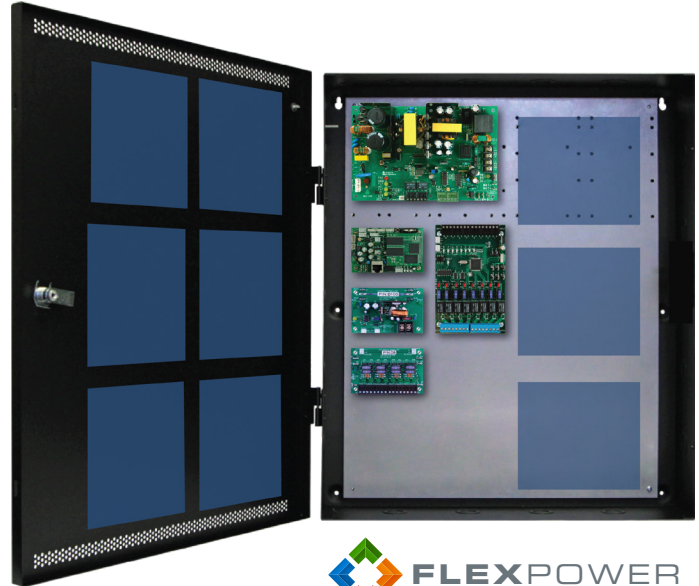

Ordering

FP0150-B100D8M8NL4E4V1

Description


150W (12V & 24V) 8 managed/aux outputs, VCLASS encl.

Specifications

Input Power	Input 120/230 VAC 50/60 Hz 170 Watts (1.41A) Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
Output Power	FP0150: 12V/12A or 24V/6A 150 Watts Outputs: Continuous (DC1) Resettable (DC2) 8 auxiliary outputs, fused at 3A each 8 lock control outputs, fused at 3A each 120 mV output voltage ripple System Efficiency: 87% System BTU Rating: 66 BTU/Hr
Battery Charging	Independent built-in 2A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Charges up to 80Ah battery sets within UL limit Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
Supervision	AC Fail (form "C" contacts) System Fault (form "C" contacts) may be triggered by low/no battery, short to earth ground, power supply failure or blown fuse
Visual Indicators	AC input, DC1 and DC2 output System fault AC fault Short to earth ground Reverse battery polarity Fire Alarm Input activated B100: DC input, output and Fault D8: DC outputs M8: DC inputs, outputs and fault
Regulatory Compliance (LSP equipment)	UL294, UL603, UL1076 ULC S318, ULC S319, CSA C22.2 #107.1, CSA C22.2 #60950 CE CSFM Approved FCC Part 15, Subpart B
Physical Dimensions	Enclosure: 24.00H x 20.00W x 6.50D in. (61.00 x 51.00 x 16.50 cm)
Mounting Pattern For	VERTX or Aero Modules



E4V1 door and backplate mounting patterns

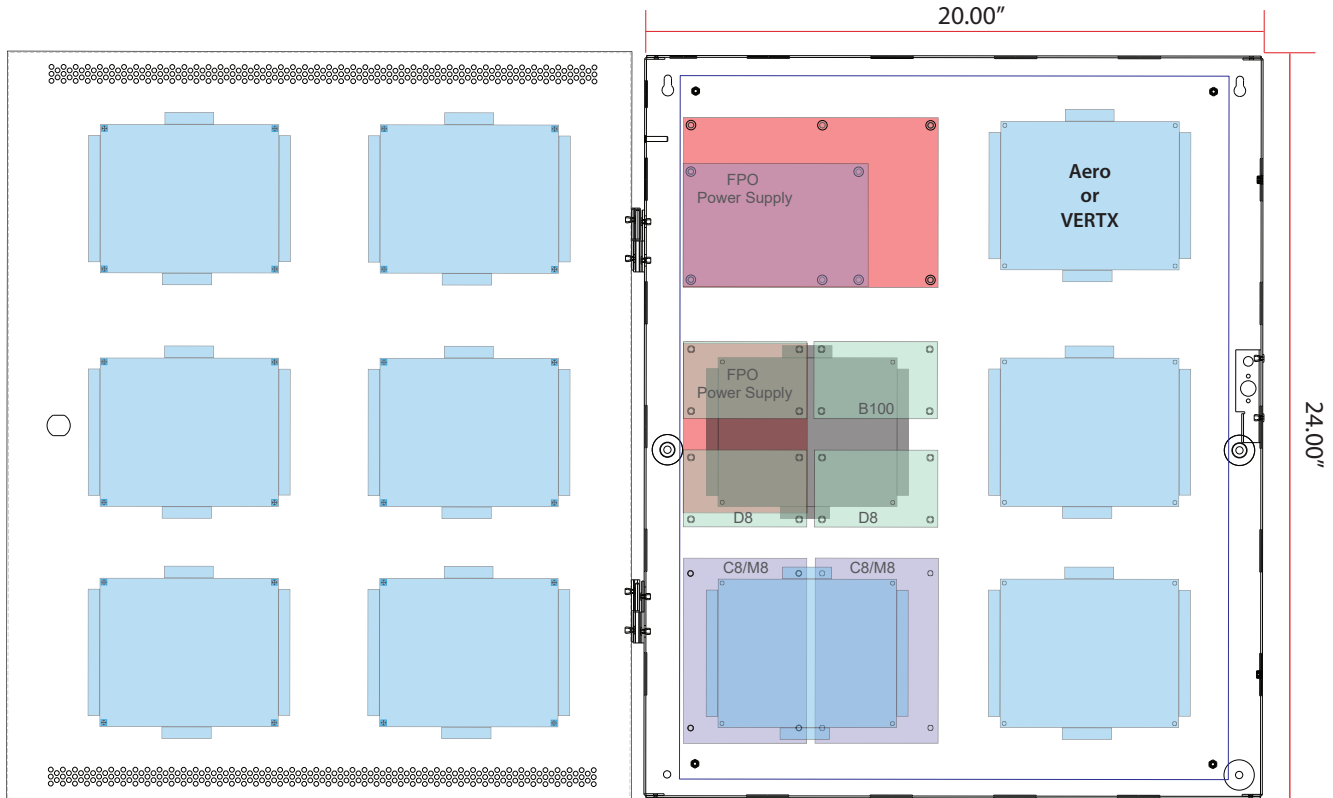

LifeSafetyPower.com

(888) 577-2898
info@lifesafetypower.com

Specifications subject to change without notice.

© 2022 LifeSafety Power. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power. All other trademarks and copyrights are the property of their respective owners.
P01-772A 07/22

LifeSafety Power
10027 S. 51st Street, Suite 102
Phoenix, AZ 85044 USA