

## Overview

HCLASS™ Unified Power Solutions are engineered to house FlexPower® power modules alongside HW Pro-Watch™ access hardware in one compact, secure system.

This unit is a 12V and 24V DC dual voltage network managed access power system.

A M8 managed control modules provide eight access control inputs capable of voltage or dry contact activation, and eight outputs programmable for failsafe / failsecure operation at either 12 or 24 VDC and controlled by the integrated fire alarm interface circuit on the FPO. A D8 module provides eight auxiliary outputs and each output is configurable for 12 or 24VDC operation.


HCLASS enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch.

## System Features

- ◆ **FPO offline power supply**
  - 120 or 230 VAC input
  - 12 and 24 VDC outputs
  - On board Fire Alarm Interface
  - Continuous and resettable DC
- ◆ **Distributed outputs**
  - Eight auxiliary, power limited at 2.5A each
  - Eight managed - fused at 3A each
- ◆ **Remote Monitoring & Control**
  - Live voltage / current reporting
  - Remote battery load testing
  - Output power cycling and abnormal operation alert
  - System / AC fault reporting
  - Email and SNMP trap notification
- ◆ **Lifetime Warranty**

## Enclosure Features

- ◆ **Labor saving design**
  - Pre-wired power section
  - Pre-punched knockouts
  - Removeable backplate simplifies installs
  - Pre-defined hole pattern for power section
  - Access panels mount on threaded standoffs - no drilling required
- ◆ **Additional benefits**
  - Wire management room
  - 6.5" enclosure depth fits battery set
  - Tamper switch, lock, dual key set standard
  - Mounting hardware for access boards included

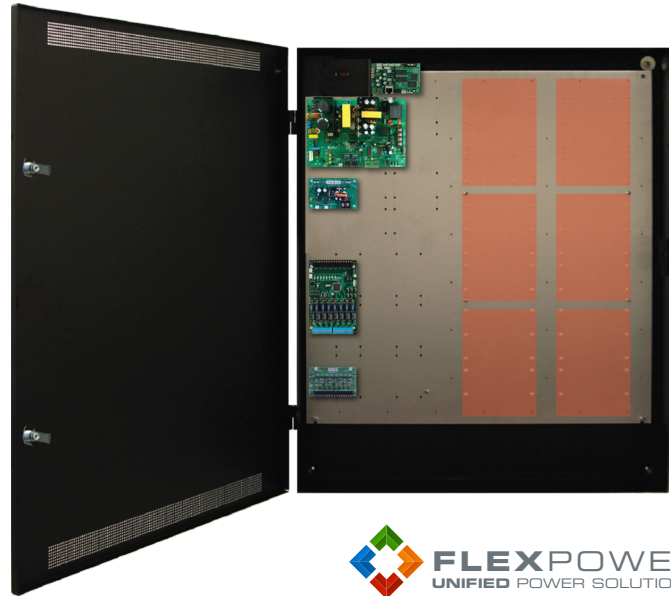

## Ordering

FP0150-B100D8PM8NL4E8H

## Description


150W (12V & 24V) 8 managed/aux outputs, ntwrk



## Specifications

<b>Input Power</b>	Input 120/230 VAC 50/60 Hz   170 Watts (1.41 Amps) Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
<b>Output Power</b>	4A@12V and 4A@24V DC, 150W maximum combined output power Outputs: Continuous (DC1) Resettable (DC2) 8 auxiliary outputs, class 2 power limited at 2.5A each 8 managed outputs, fused at 3A each 120 mV output voltage ripple System Efficiency: 88%   System BTU Rating: 66 BTU/Hr
<b>Battery Charging</b>	Independent built-in 2A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Charges up to 80Ah battery sets within UL limit Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
<b>Supervision</b>	AC Fail (form "C" contacts) System Fault (form "C" contacts) may be triggered by low/no battery, short to earth ground, power supply failure or blown fuse
<b>Visual Indicators</b>	AC input, DC1 and DC2 output System fault   AC fault   Short to earth ground   Reverse battery polarity Fire Alarm Input activated B100: DC input, output and Fault D8P: DC output M8: DC input, output and Fault
<b>Regulatory Compliance (LSP equipment)</b>	UL294, UL603, UL1076 ULC S318, ULC S319, CSA C22.2 #107.1, CSA C22.2 #60950 CE   CSFM Approved   FCC Part 15, Subpart B
<b>Enclosure Dimensions</b>	Size: 36.00H x 30.00W x 6.50D in. (91.00 x 76.00 x 16.50 cm)   Weight: 85 lbs.
<b>Access Panel Mounting</b>	Pro-Watch Controllers

**PRO-WATCH Backplate mounting pattern for power and access boards**

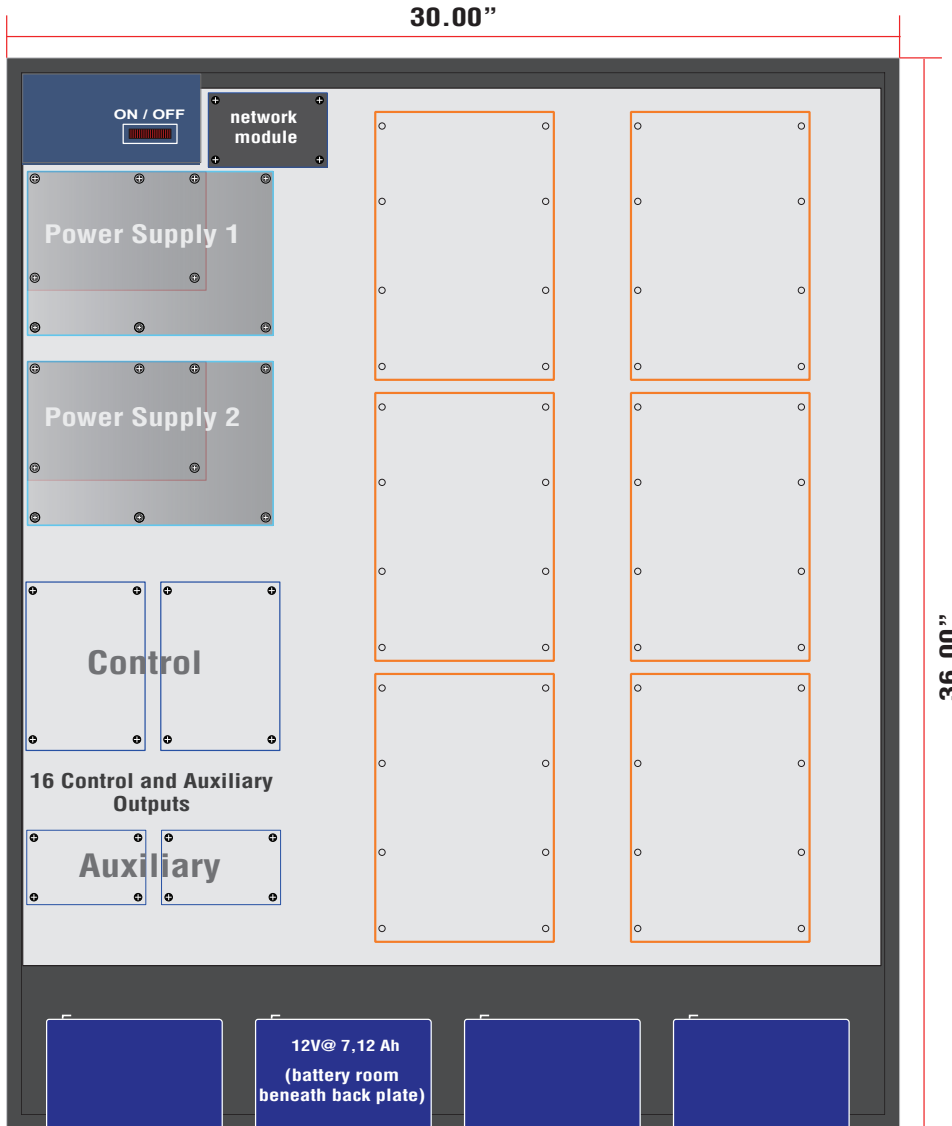

**LifeSafetyPower.com**

(888) 577-2898  
info@lifesafetypower.com

Specifications subject to change without notice.

© 2022 LifeSafety Power. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power. All other trademarks and copyrights are the property of their respective owners.

P01-804A 06/22

**LifeSafety Power**  
10027 S. 51st Street, Suite 102  
Phoenix, AZ 85044 USA