

Overview

SCLASS™ Unified Power Systems are engineered to house FlexPower® power modules alongside SWH iSTAR™ access hardware in one compact listed enclosure.

This unit is a 12V and 24V DC dual voltage managed access power system.

One M8 managed module provides eight access managed inputs capable of voltage or dry contact activation, and eight outputs programmable for failsafe / failsecure operation at either 12 or 24 VDC and managed by the integrated fire alarm interface circuit on the FPO.


SCLASS enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch.

System Features

- ◆ **FPO offline power supply**
 - 120 or 230 VAC input
 - 12 and 24 VDC outputs
 - On board Fire Alarm Interface
 - Continuous and resettable DC
- ◆ **Distributed output module**
 - Eight managed, fused at 3A each
- ◆ **Expansion options**
 - Increased power, multiple voltages
 - Additional distribution outputs
 - Network monitoring and reporting
- ◆ **Lifetime Warranty**

Enclosure Features

- ◆ **Labor saving design**
 - Pre-wired power section
 - Pre-punched knockouts
 - Removeable backplate simplifies installs
 - Pre-defined hole pattern for power section
 - Access panels mount on threaded standoffs - no drilling required
- ◆ **Additional benefits**
 - Wire management room
 - 6.5" enclosure depth fits battery set
 - Tamper switch, lock, dual key set standard
 - Mounting hardware for access boards included

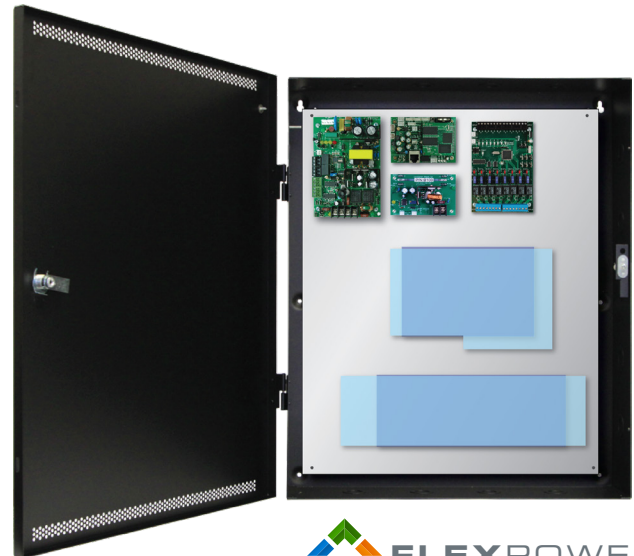

Ordering

FP075-B100M8NL4E4S

Description


75W (12V & 24V) 8 managed outputs, SCLASS system

Specifications

Input Power	Input 120/230 VAC 50/60 Hz 83 Watts (0.70A) Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
Output Power	4A@12V and 2A@24V DC, 75W maximum combined output power Outputs: Continuous (DC1) Resettable (DC2) 8 managed control outputs, fused at 3A each 120 mV output voltage ripple System Efficiency: 83% System BTU Rating: 33 BTU/Hr
Battery Charging	Independent built-in 1A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
Supervision	AC Fail (form "C" contacts) System fail (form "C" contacts) may be triggered by low/no battery, short to earth ground and power supply failure
Visual Indicators	AC input, DC1 and DC2 output System fault AC fault Short to earth ground Reverse battery polarity Fire Alarm Input activated B100: DC input / output and Fault M8: DC input / output and Fault
Regulatory Compliance LSP/SWH Joint Listing	UL294, UL603, UL1076 ULC S318, ULC S319, CSA C22.2 #107.1, CSA C22.2 #60950 CE FCC Part 15, Subpart B CSFM Approved
Physical Dimensions	Enclosure: 24.00H x 20.00W x 6.50D in. (61.00 x 51.00 x 16.50 cm)
Access Mounting	SWH ULTRA SE or ULTRA Controllers



SCLASS backplate board mounting pattern

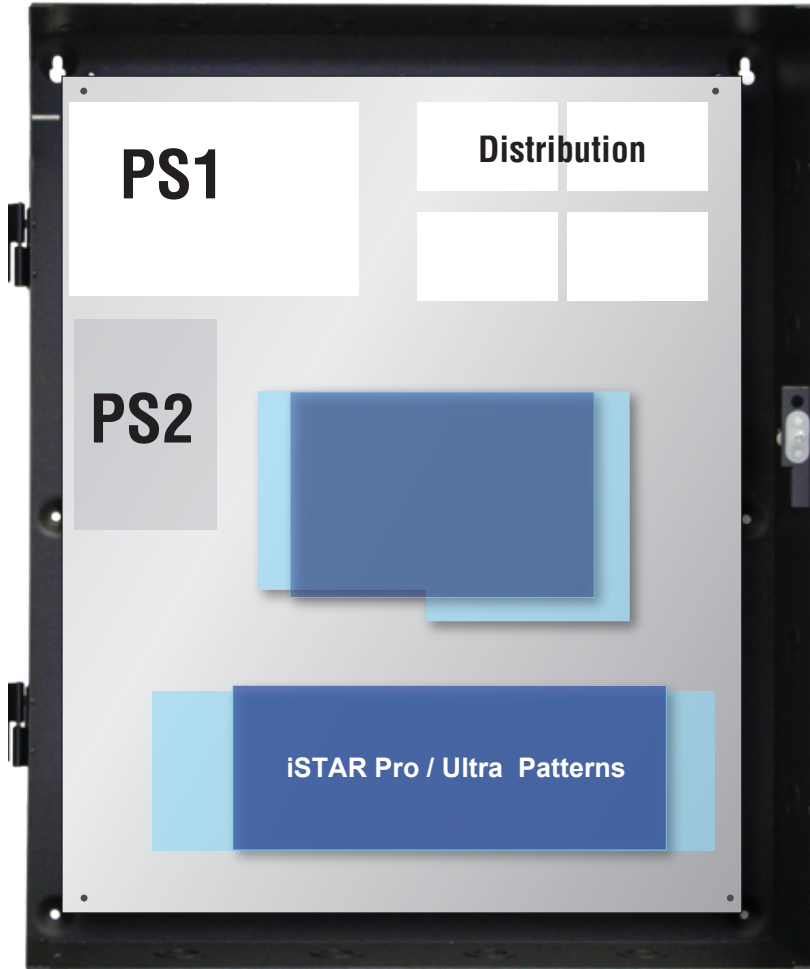

Pattern	Slot	Fits AMAG
Blue	1	iSTAR Ultra SE
Light Blue	1	iSTAR Ultra

LifeSafetyPower.com

(888) 577-2898
info@lifesafetypower.com

Specifications subject to change without notice.

© 2022 LifeSafety Power. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power. All other trademarks and copyrights are the property of their respective owners.
P01-778A 07/22

LifeSafety Power
10027 S. 51st Street, Suite 102
Phoenix, AZ 85044 USA
PH 888-577-2898
info@lifesafetypower.com